

Usual values and safeguard settings

# X62DF

Issue 004 2021-10

**© 2021 Winterthur Gas & Diesel Ltd. – All rights reserved**

No part of this publication may be reproduced or copied in any form or by any means (electronic, mechanical, graphic, photocopying, recording, taping or other information retrieval systems) without the prior written permission of the copyright holder. Winterthur Gas & Diesel Ltd. makes no representation, warranty (express or implied) in this publication and assumes no responsibility for the correctness, errors or omissions of information contained herein. Information in this publication is subject to change without notice.

**NO LIABILITY, WHETHER DIRECT, INDIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL, IS ASSUMED WITH RESPECT TO THE INFORMATION CONTAINED HEREIN. THIS PUBLICATION IS INTENDED FOR INFORMATION PURPOSES ONLY.**

[www.wingd.com](http://www.wingd.com)

# 1 Usual values and safeguard settings

1.1	List of usual values and safeguard settings - change record.....	4
1.2	List of usual values and safeguard settings - general.....	6
1.3	List of usual values and safeguard settings.....	10

## 1.1 List of usual values and safeguard settings - change record

### Tab 1-1 Change record

Data module code, issue	Status
Chapter number - technical name Reason for change	
<b>Revised issue 004, 2021-09</b>	
WINGDX62DF-AA00-HA1-50-0000-00AAA-033B-A , issue 04 3 - List of usual values and safeguard settings Tab. Fuel System - Updated the description in fuel supply - system side.	revised
<b>Revised issue 003, 2019-09</b>	
WINGDX62DF-AA00-HA1-50-0000-00AAA-033B-A , issue 04 3 - List of usual values and safeguard settings Tab 5 - Changed values for PT1101A and PS1101S (cylinder cooling water) Tab 6 - Changed values for PT2021A (crosshead bearing oil) Tab 12 - Changed values for TE3731-nnA (exhaust gas) Tab 14 - Changed values for TE4801-nnC and TE4841-nnC (cylinder liner wall) Tab 14 - Changed notes for ST5201-nnA (impeller shaft)	revised
<b>Revised issue 002, 2019-04</b>	
WINGDX62DF-AA00-HA1-50-0000-00AAA-003D-A , issue 01 1 - List of usual values and safeguard settings - change record New chapter 1	new
WINGDX62DF-AA00-HA1-50-0000-00AAA-033B-A , issue 03 3 - List of usual values and safeguard settings Tab 5 - Changed engine connections for PT1101A and TE1111A Tab 5 - Changed values for PT1101A and PS1101S Tab 5 - Added data for PT1102A Tab 9 - Added range for cylinder oil temperature at engine inlet Tab 10 - Deleted data for iGPR	revised

**Page left intentionally blank**

## 1.2 List of usual values and safeguard settings - general

For each system of the engine the tables in the chapter that follows give the values for usual operation and the trigger values for safeguard settings.

### 1.2.1 Tables - identification

The tables give the data that follow:

- **Description**

This list gives the description of the object or of the system.

- **Medium / physical value / location**

This list gives the data that follow:

- Medium that is monitored
- Physical parameter and unit
- Location of the measurement

- **Usual operation (value or range)**

This list gives the setpoint or the approximate range for usual operation. During operation the current values can have small differences to the given values.

- **Signal number**

This list gives the signal number as follows (refer also to [Para 1.2.2](#)):

- First two letters (XX) - Function code
- Four digit number of the signal (for example 10NN)
  - First two numbers - Function group
  - Second two numbers - Running number
- -nn - If more than one signal of the same type is applicable (for example TE2501-nnA is TE2501A, TE2502A, TE2503A)
- Last letter - Applied system

- **Function**

This list gives one of the functions that follow:

- ALM - Alarm
- GTrip - Gas Trip (the ECS changes to diesel mode)
- SLD - Slowdown
- SHD - Shutdown

- **Level**

This list gives one of the levels that follow:

- D - Deviation
- H - High
- L - Low

- **Trigger value**

This list gives the value at which the related safeguard function starts.

For the analysis elements (AE) of concentration:

- max - maximum concentration

For the level switches (LS) and flow switches (FS):

- min - minimum or no flow
- max - maximum flow


- **Delay**

This list gives the delay of the action (in seconds) after the trigger value occurs.

## 1.2.2 Signal codes - identification

An example of a signal code is shown in [Figure 1-1](#).

**Fig 1-1 Signal codes**

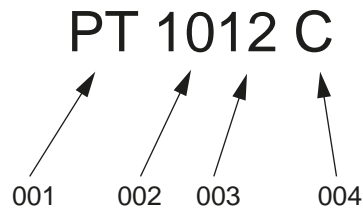

00207

### Legend

001 Function code  
002 Function group

003 Running number  
004 Applied system

**Tab 1-2 Function code**

Code	First position	Second position
A	Analysis	n/a
C	Control	Control
E	n/a	Element
F	Flow	n/a
G	Gauge	n/a
H	Hand	n/a
I	n/a	Indication
J	Power	n/a
L	Level	n/a
P	Pressure	n/a
S	Speed	Switch
T	Temperature	Transmitter
V	n/a	Valve
X	Unclassified	Unclassified
Y	Vibration	Relay
Z	Position (binary)	n/a



**Tab 1-3 Function group**

Code	Signal type	System
10 to 19	Signals from the engine	Cooling water
20 to 29	Signals from the engine	System oil, cooling oil
31	Signals from the engine	Cylinder lubrication
33	Signals from the engine	Fuel gas
34	Signals from the engine	Fuel oil
35	Signals from the engine	Fuel gas
37	Signals from the engine	Exhaust gas
40 to 49	Signals from the engine	Air systems
50 to 59	Signals from the engine	Miscellaneous
60 to 69	Signals from the engine	Spare
70 to 79	Signals to the engine	Miscellaneous
80 to 89	Signals to the engine	Miscellaneous

**Tab 1-4 Applied system**

Code	Description
A	Alarm and monitoring system
C	Control system
L	Local
M	Measured indication, Local control panel
S	Safety system
W	Wrong way alarm
X	Miscellaneous

### 1.3 List of usual values and safeguard settings

On the pages that follow you find the values for usual operation and the trigger values for safeguard settings as follows:

- [Table 1-5 - Cooling water systems \(XX10NN to XX19NN\)](#)
- [Table 1-6 - Oil systems \(XX2NNN, part 1\)](#)
- [Table 1-7 - Oil systems \(XX2NNN, part 2\)](#)
- [Table 1-8 - Oil systems \(XX2NNN, part 3 \(turbocharger bearing oil\)\)](#)
- [Table 1-9 - Oil systems \(XX2NNN, part 4\)](#)
- [Table 1-10 - Gas system \(XX33NN and XX39NN\)](#)
- [Table 1-11 - Fuel system \(XX34NN\)](#)
- [Table 1-12 - Exhaust gas system \(XX37NN\)](#)
- [Table 1-13 - Air systems \(XX40NN to XX44NN\)](#)
- [Table 1-14 - Miscellaneous items \(XX45NN to XX52NN\)](#)

Usual values and safeguard settings

List of usual values and safeguard settings

**Tab 1-5 Cooling water systems (XX10NN to XX19NN)**

Description Medium / physical value / location	Usual operation (value or range)	Safeguard setting				
		Signal number	Function	Level	Trigger value	Delay
<b>Cylinder liner, cylinder cover</b>						
HT cylinder cooling water / pressure [bar] / engine inlet connection 01	3.2 to 5	PT1101A	ALM	L	≤ 3.0	0
			SLD	L	≤ 2.8	60
	-	PS1101S	SHD	L	≤ 2.5	60
HT cylinder cooling water / differential pressure [bar] / between engine inlet connections 01 and 02	- <sup>1</sup>	PT1102A	ALM	L	- <sup>1</sup>	0
			SLD	L	- <sup>1</sup>	60
HT cylinder cooling water / temperature [°C] / engine inlet connection 01	72 to 90	TE1111A	ALM	L	≤ 70	0
HT cylinder cooling water / temperature [°C] / outlet each cylinder (engine outlet connection 03)	90 +/-2 <sup>2</sup> 90 +/-4 <sup>3</sup>	TE1121-nnA	ALM	H	≥ 95	0
			SLD	H	≥ 97	60
<b>Scavenge air cooler (SAC)</b>						
SAC LT cooling water / pressure [bar] / engine inlet connection 07	2.5 to 4	PT1361A	ALM	L	≤ 2.0	0
SAC LT cooling water / temperature [°C] / engine inlet connection 07	25 to 36 <sup>4</sup>	TE1371A	ALM	L	≤ 21	0
SAC LT cooling water / temperature [°C] / outlet each SAC	25 to 75	TE1381-nnA	ALM	H	≥ 80	0

1 This value must be calculated related to measurements during seatrial.

2 This value is applicable for stable operation condition.

3 This value is applicable for transient operation condition.

4 WinGD recommends a setpoint value of 25°C. 36°C is only permitted if the seawater temperature is 32°C.

Usual values and safeguard settings

List of usual values and safeguard settings

Tab 1-6 Oil systems (XX2NNN, part 1)

Description Medium / physical value / location	Usual operation (value or range)	Safeguard setting				
		Signal number	Function	Level	Trigger value	Delay
<b>Lubricating oil supply - system side</b>						
Main lubricating oil / pressure [bar] / engine inlet connection 25	4.2 to 5	PT2001A	ALM	L	≤ 4.0	0
			SLD	L	≤ 3.8	60
	-	PS2002S	SHD	L	≤ 3.3	10
Main lubricating oil / temperature [°C] / engine inlet connection 25	45 +/-2 <sup>1</sup>	TE2011A	ALM	H	≥ 50	0
	45 +/-4 <sup>2</sup>		SLD	H	≥ 55	60
External crosshead bearing oil / pressure [bar] / engine inlet connection 30	10.2 to 13	PT2021A	ALM	L	≤ 10.0 <sup>3</sup>	10
			SLD	L	≤ 9.0 <sup>3</sup>	60
<b>Injector lubricating oil</b>						
Injector lubricating oil / pressure [bar] / inlet injectors	4.2 to 5	PT2003A	ALM	L	≤ 2.6 <sup>4</sup>	0
<b>Bearing oil</b>						
Main bearing oil / temperature [°C] / outlet each main bearing (optional)	45 to 60	TE2101-nnA	ALM	H	≥ 65	0
			SLD	H	≥ 70	60
Crank bearing oil / temperature [°C] / outlet each crank bearing (optional)	45 to 60	TE2201-nnA	ALM	H	≥ 65	0
			SLD	H	≥ 70	60
Crosshead bearing oil / temperature [°C] / outlet each crosshead bearing (optional)	45 to 60	TE2301-nnA	ALM	H	≥ 65	0
			SLD	H	≥ 70	60

- 1 This value is applicable for stable operation condition.
- 2 This value is applicable for transient operation condition.
- 3 The trigger value is only applicable above 40% engine load.
- 4 The trigger value is not applicable when the engine has stopped.

Usual values and safeguard settings

List of usual values and safeguard settings

Tab 1-7 Oil systems (XX2NNN, part 2)

Description Medium / physical value / location	Usual operation (value or range)	Safeguard setting				
		Signal number	Function	Level	Trigger value	Delay
<b>Servo oil</b>						
Servo oil / pressure [bar] / distributor pipe (mini rail) <sup>1</sup>	60	PT2041A	ALM	L	≤ 40.0	3
			ALM	H	≥ 75.0	3
Servo oil / flow / inlet each servo oil pump <sup>2</sup>	-	FS2061-nnA	ALM	L	min	0
			ALM	H	max	0
Servo oil leakage / flow / servo oil supply unit	-	LS2055A	ALM	H	max	10
<b>Oil mist</b>						
Oil mist / concentration / crankcase (each cylinder) <sup>3</sup>	-	AE2401-nnA	ALM	H	max	0
		AS2401A	ALM	H	max	0
	-	AS2401S	SLD	H	max	60
Oil mist / concentration / gearcase	-	AE2415A	ALM	H	max	0
Oil mist / concentration / fuel supply unit	-	AE2421A	ALM	H	max	0
<b>Piston cooling oil</b>						
Piston cooling oil / temperature [°C] / outlet each cylinder	45 to 75	TE2501-nnA	ALM	H	≥ 80	0
			SLD	H	≥ 85	60
Piston cooling oil / flow [l/min] / outlet each cylinder	-	FS2521-nnS	SHD	H	max	15
			SHD	L	min	15

1 The trigger values are not applicable when the engine has stopped.

2 The trigger values are only applicable above 30% engine load.

3 The concentration is related to the lower explosive level (LEL).

Usual values and safeguard settings

List of usual values and safeguard settings

Tab 1-8 Oil systems (XX2NNN, part 3 (turbocharger bearing oil))

Description Medium / physical value / location	Usual operation (value or range)	Safeguard setting				
		Signal number	Function	Level	Trigger value	Delay
<b>Bearing oil turbocharger ABB A100/200-L with internal oil</b>						
TC bearing oil / pressure [bar] / inlet each turbocharger	1.5 to 5.0	PT2611-nnA	ALM	L	≤ 1.0	5
			SLD	L	≤ 0.8	60
	-	PS2611-nnS	SHD	L	≤ 0.6	5
TC bearing oil / temperature [°C] / outlet each turbocharger	45 to 100	TE2601-nnA	ALM	H	≥ 110	0
			SLD	H	≥ 120	60
<b>Bearing oil turbocharger ABB A100/200-L with external oil</b>						
TC bearing oil / pressure [bar] / inlet each turbocharger	1.5 to 5.0	PT2611-nnA	ALM	L	≤ 1.3	5
			SLD	L	≤ 1.1	60
	-	PS2611-nnS	SHD	L	≤ 0.9	5
TC bearing oil / temperature [°C] / inlet turbocharger	45 to 80	TE2621A	ALM	H	≥ 85	0
			SLD	H	≥ 90	60
TC bearing oil / temperature [°C] / outlet each turbocharger	45 to 120	TE2601-nnA	ALM	H	≥ 130	0
			SLD	H	≥ 140	60
<b>Bearing oil turbocharger MHI MET with internal oil</b>						
TC bearing oil / pressure [bar] / inlet each turbocharger	1.0 to 5.0	PT2611-nnA	ALM	L	≤ 0.7	5
			SLD	L	≤ 0.6	60
	-	PS2611-nnS	SHD	L	≤ 0.4	5
TC bearing oil / temperature [°C] / outlet each turbocharger	45 to 80	TE2601-nnA	ALM	H	≥ 85	0
			SLD	H	≥ 90	60
<b>Bearing oil turbocharger MHI MET with external oil</b>						
TC bearing oil / pressure [bar] / inlet each turbocharger	1.0 to 5.0	PT2611-nnA	ALM	L	≤ 0.7	5
			SLD	L	≤ 0.6	60
	-	PS2611-nnS	SHD	L	≤ 0.4	5
TC bearing oil / temperature [°C] / inlet turbocharger	45 to 50	TE2621A	ALM	H	≥ 60	0
			SLD	H	≥ 65	60
TC bearing oil / temperature [°C] / outlet each turbocharger	45 to 80	TE2601-nnA	ALM	H	≥ 85	0
			SLD	H	≥ 90	60

Usual values and safeguard settings

List of usual values and safeguard settings

Tab 1-9 Oil systems (XX2NNN, part 4)

Description Medium / physical value / location	Usual operation (value or range)	Safeguard setting				
		Signal number	Function	Level	Trigger value	Delay
<b>Damper oil</b>						
Damper oil / pressure [bar] / inlet torsional vibration damper <sup>1</sup>	2.8 to 5.0	PT2711A	ALM	L	≤ 2.2	0
Damper oil / pressure [bar] / axial vibration damper space aft side	1.8 to 5.0	PT2721A	ALM	L	≤ 1.7	60
Damper oil / pressure [bar] / axial vibration damper space fore side	1.8 to 5.0	PT2722A	ALM	L	≤ 1.7	60
<b>Cylinder oil</b>						
Cylinder oil / pressure [bar] / cylinder oil rail <sup>2</sup>	≥ 0.3	PT3124A	ALM	L	≤ 0.1	30
Cylinder oil / temperature [°C] / engine inlet	35 to 50	-	-	-	-	-

1 The setpoint and trigger values can be different. For the applicable values refer to the specification of the damper manufacturer.

2 This value is only applicable if the engine has no iCAT.

Usual values and safeguard settings

List of usual values and safeguard settings

Tab 1-10 Gas system (XX33NN and XX39NN)

Description Medium / physical value / location	Usual operation (value or range)	Safeguard setting				
		Signal number	Function	Level	Trigger value	Delay
<b>Gas leakage detection</b>						
Gas leakage / concentration [% LEL] / piston underside (engine inlet connection 82) <sup>1</sup>	-	AE3315C	ALM	H	≥ 20	0
			GTrip	H	≥ 40	0
<b>Gas supply - iGPR</b>						
Gas / pressure [bar] / inlet iGPR (engine inlet connection 78)	10 to 15	PT3941C	ALM	H	≥ 16.0	0
			GTrip	H	≥ 17.0	0
Gas / flow [kg/h] / inlet iGPR (engine inlet connection 78)	1000 to 1800 <sup>3</sup>	FT3942C	-	-	-	-
Gas / pressure [bar] / outlet flowmeter	10 to 15	PT3901C	-	-	-	-
		PS3901S	GTrip	H	≥ 18.0	0
		PS3902S	GTrip	L	≤ 2.0	0
Gas / temperature [°C] / outlet flowmeter	20 to 50 <sup>4</sup>	TT3901C	-	-	-	-
		TS3901S	GTrip	H	≥ 60	3
		TS3902S	GTrip	L	≤ 0 <sup>4</sup>	3
Gas / underpressure [mbar] / iGPR enclosure	10 to 20	PT3903C	-	-	-	-
Inert gas / pressure [bar] / engine inlet connection 83	5 to 15	PT3905C	-	-	-	-
Gas / pressure [bar] / inlet pressure regulation valve	10 to 15	PT3906C	-	-	-	-
<b>Gas supply - gas rail</b>						
Gas / pressure [bar] / gas rail	2 to 14 <sup>5</sup>	PT3595C	-	-	-	-
		PT3597C	-	-	-	-
Air / flow [l/min] / inlet double wall pipe	41 to 45	FS3904S	GTrip	L	≤ 40	0

1 LEL - Lower explosive level

2 Related to the GTD requirement for the selected rating and to the LHV of the gas quality

3 Related to the engine load

4 For a mixture of volatile organic compounds (VOC) and liquefied natural gas (LNG) the usual operation range is 45 to 55°C. The related trigger value is ≤ 40°C.

5 Related to the engine load



Usual values and safeguard settings

List of usual values and safeguard settings

Tab 1-11 Fuel system (XX34NN)

Description Medium / physical value / location	Usual operation (value or range)	Safeguard setting				
		Signal number	Function	Level	Trigger value	Delay
<b>Fuel supply - system side</b>						
High viscosity fuel which requires heating (HFO, excluding RMA10) / viscosity [cSt] / engine inlet connection 49	13 to 17	- <sup>1</sup>	ALM	H	≥ 20	0
			ALM	L	≤ 10	0
Low viscosity fuel which requires no heating (distillates, RMA10, most ULSFO) / viscosity [cSt] / engine inlet connection 49	3 to 14	- <sup>1</sup>	ALM	H	≥ 17	0
			ALM	L	≤ 2	0
<b>Fuel supply unit</b>						
Fuel / pressure [bar] / inlet fuel supply unit	7.5 to 10 <sup>2</sup>	PT3421A	ALM	L	≤ 7	0
Fuel / temperature [°C] / inlet fuel supply unit <sup>3</sup>	20 to 150	TE3411A	ALM	H	≥ 50 to 160	0
			ALM	L	≤ 20 to 130	0
Fuel leakage / flow / outlet fuel supply unit	-	LS3426A	ALM	H	max	10
Fuel leakage / flow / outlet fuel rail items	-	LS3446A	ALM	H	max	10
<b>Rail unit</b>						
Leakage / flow / outlet rail unit	-	LS3444A	ALM	H	max	10
<b>Pilot fuel filter</b>						
Fuel / differential pressure [bar] / pilot fuel filter	-	PS3464A	ALM	H	≥ 2.5	0

- 1 This measurement is not included in the standard engine supply (the viscometer is a yard supply item).
- 2 When the engine has stopped, the setpoint is 10 bar. The value decreases when the engine load increases.
- 3 The values are related to the fuel viscosity.

Usual values and safeguard settings

List of usual values and safeguard settings

**Tab 1-12 Exhaust gas system (XX37NN)**

Description	Usual operation (value or range)	Safeguard setting				
Medium / physical value / location		Signal number	Function	Level	Trigger value	Delay
<b>Exhaust pipe / manifold</b>						
Exhaust gas / temperature [°C] / outlet each cylinder	-	TE3701-nnA	ALM	H	≥ 515	0
			ALM	D	≥ 50	0
			SLD	H	≥ 530	60
			SLD	D	≥ 70	60
Exhaust gas / temperature [°C] / inlet each turbocharger	-	TE3721-nnA	ALM	H	≥ 515	0
			SLD	H	≥ 530	60
Exhaust gas / temperature [°C] / outlet each turbocharger	-	TE3731-nnA	ALM	H	≥ 340	0
			SLD	H	≥ 380	60

Usual values and safeguard settings

List of usual values and safeguard settings

Tab 1-13 Air systems (XX40NN to XX44NN)

Description Medium / physical value / location	Usual operation (value or range)	Safeguard setting				
		Signal number	Function	Level	Trigger value	Delay
<b>Scavenge air receiver</b>						
Scavenge air / temperature [°C] / outlet each air cooler	28 to 55	TE4031-nnA	ALM	L	≤ 25	0
			ALM	H	≥ 60	0
			SLD	H	≥ 70	60
Scavenge air / temperature [°C] / piston underside each cylinder	28 to 55	TE4081-nnA	ALM	H	≥ 80	0
			SLD	H	≥ 120	60
Condensation water / flow / at each water separator	-	LS4071-nnA	ALM	H	max	10
			SLD	H	max	60
Condensation water / flow / upstream each water separator	-	LS4075-nnA	ALM	H	max	10
			SLD	H	max	60
<b>Starting air supply</b>						
Starting air supply / pressure [bar] / engine inlet connection 40	20 to 30	-	-	-	-	-
<b>Control air supply unit</b>						
Control air supply / pressure [bar] / engine inlet connection 45	7 to 9	-	-	-	-	-
Control air / pressure [bar] / outlet usual supply	6.5	PT4401A	ALM	L	≤ 6.0	0
Control air / pressure [bar] / outlet stand-by supply	6.0	PT4411A	ALM	L	≤ 5.5	0
Control air / pressure [bar] / air tank for safety supply	6.5 or 6.0	PT4421A	ALM	L	≤ 5.0	15
<b>Air spring</b>						
Air spring air / pressure [bar] / supply to air spring	6.5 or 6.0	PT4341A	ALM	H	≥ 7.5	0
			ALM	L	≤ 5.5	0
			SLD	L	≤ 5.0	60
	-	PS4341S	SHD	L	≤ 4.5	0
Oil leakage / flow / air spring at driving end	-	LS4351A	ALM	H	max	5
Oil leakage / flow / air spring at free end	-	LS4352A	ALM	H	max	5

Usual values and safeguard settings

List of usual values and safeguard settings

**Tab 1-14 Miscellaneous items (XX45NN to XX52NN)**

Description Medium / physical value / location	Usual operation (value or range)	Safeguard setting				
		Signal number	Function	Level	Trigger value	Delay
<b>Thrust bearing</b>						
Pad / temperature [°C] / thrust bearing (AHEAD)	45 to 75	TE4521A	ALM	H	≥ 80	0
			SLD	H	≥ 85	60
	-	TS4521S	SHD	H	≥ 90	60
<b>Cylinder liner</b>						
Wall / temperature [°C] / each cylinder liner aft side	≤ 230	TE4801-nnC	ALM	H	≥ 250	0
			SLD	H	≥ 270	60
Wall / temperature [°C] / each cylinder liner fore side	≤ 230	TE4841-nnC	ALM	H	≥ 250	0
			SLD	H	≥ 270	60
<b>Powertrain</b>						
Crankshaft / speed [% of CMCR] / crankshaft	-	ST5111-12S	SHD	H	≥ 110	0
<b>Tachometer turbocharger</b>						
Impeller shaft / overspeed [rpm] / each ABB turbocharger	-	ST5201-nnA	ALM	H	refer to note <sup>1</sup>	0
Impeller shaft / overspeed [rpm] / each MHI turbocharger	-	ST5201-nnA	ALM	H	refer to note <sup>2</sup>	0

- 1 For ABB TC the alarm value is 0.97 x nMax on rating plate (nMax usually referred to as nMmax in 1/s).
- 2 For MHI TC the alarm value is 0.95 x nMax on rating plate (nMax usually referred to as overspeed in rpm).

Some items are continuously monitored for correct function. If an item becomes defective, the AMS sends a message to the ship alarm system, refer to [Table 1-15 - Failure messages](#).

**Tab 1-15 Failure messages**

Medium / location	Signal number	Delay
Failure of oil mist detector	XS2411A	0
Failure of fuel heating	XS3463A	0
Failure of fuel pump actuator	XS5046A	0

**Page left intentionally blank**